


ALL SIDEWALK CURB RAMPS SHALL HAVE  
DETECTABLE WARNINGS IN ACCORDANCE WITH  
THE REQUIREMENTS OF THE CODE OF FEDERAL  
REGUATIONS 28 CFR PART 36 ADA STANDARDS  
FOR ACCESSIBLE DESIGN, SECTION 4.29

AREA	SURFACE MATERIAL	C	I	A	Q STORAGE REQ'D (SF)	TOTAL STORAGE REQ'D (SF)	TOTAL DEPTH OF 10' DIA. LP REQ'D (VF)	QTY OF 5' H 10' DIA LPS PROPOSED	QTY OF 5' H 10' DIA LPS PROPOSED- ROUNDED UP
A	PAVEMENT	1	0.17	4063	690.71	1899.4746	27.76197895	5.552395791	6
	LANDSCAPE	0.15	0.17	4973	126.8115				
B	ROOF	1	0.17	6364.43	1081.9531	1136.6965	16.61351213	3.322702426	4
	PAVEMENT	1	0.17	6176	1049.92				
C	LANDSCAPE	0.15	0.17	3403	86.7765	1191.411	17.4131979	3.482639579	4
	PAVEMENT	1	0.17	6507	1106.19				
TOTAL AREA				34828.43					

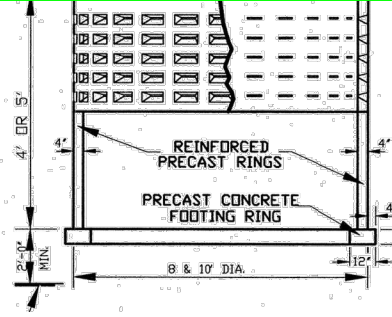

**SITE WORK**  
BEFORE STARTING WORK CALL  
TOWN ENGINEER-INSPECTORS  
224-5360